

毛細管專用離心機 Hematocrit Dedicated Type



HCD-2000

特點(HCD-2000) :

- 數位式轉速及時間顯示。
- 10組記憶系統，可預先設定常用參數。
- ABS塑鋼外殼及觀測視窗。

Feature(HCD-2000) :

- Digital speed and time display
- 10 memory programs for pre-setting parameters
- ABS hard shell and see-through window



H-240

特點(H-240) :


- 手動式煞車裝置可迅速減速。
- 電源指示燈及保險絲安全裝置。
- 回歸式定時設定裝置，時間到自動停止並有鈴聲告示。

Feature(H-240) :

- Manual-brake system provides rapid deceleration
- Power indication light and fuse safety protection
- Regressive timer, with a ringing device

Model	HCD-2000	H-240
轉速 Speed (rpm)	1,000~12,000	Fixed 12,000
最大離心力 Max. RCF (xg)	14,820	
最大容量 Max. Capacity (ml)	Hematocrit x 24	
定時器 Timer (min:sec)	99:59	0 ~ 15min
重量 Weight (kg)	10	8
尺寸 Size (W x L x H mm)	290 x 320 x 250	
電源 Power	AC 110V / 220V, 50/60Hz	

◎ 離心試管另購。 Tubes not included.

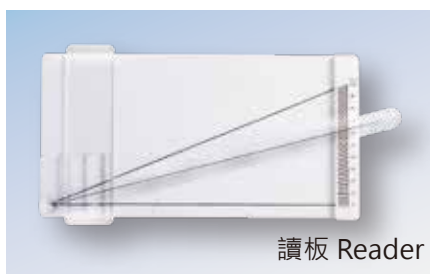

讀板 Reader



毛細管 HT tube

讀版、毛細管另購。 Reader and HT tubes not included.

■ Rotor sets for HCD-2000, H-240



RHT-240

Rotor	Capacity (ml x pcs)	Tube Size (Ø x L) mm	Max. Speed (rpm)	Max. RCF (xg)
RHT-240	Hematocrit x 24	1.1~1.2 x 75	12,000	14,820